




BEARING PRECISION AXLE CORP.

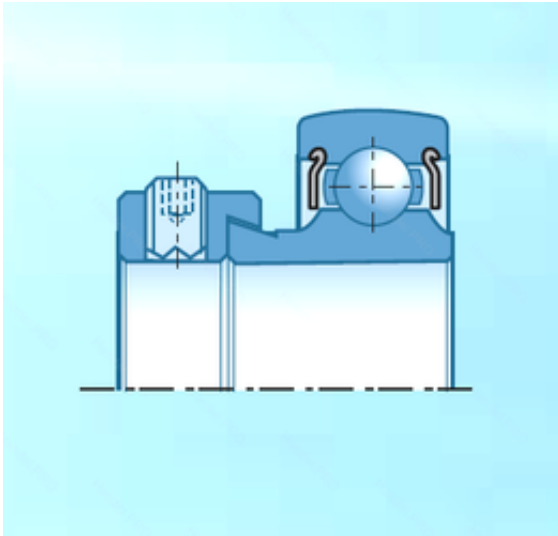

25,000 mm x 52,000 mm x 21,5 mm
EGF35260-E40-B Plain Bearings 35x39x26mm

Bearing No. AEL205D1

AEL205D1 Bearing 2D drawings and 3D CAD models

Size	25x52x21.5 mm
Bore Diameter	25,000 mm
Outer Diameter	52,000 mm
Width	21,5 mm
d	25,000 mm
D	52,000 mm
B	21,5 mm
B1	31 mm
C	15,000 mm
Category	Insert Bearings Spherical OD
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.191
EAN	4547359462074
Product Group	M06110
Inner Race Profile	Narrow Inner Ring
Outer Race Profile	Spherical
Relubricatable	Yes
Seal Type	Single Lip Contour Riding
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Snap Ring	No
Long Description	25MM Bore; Narrow Inner Ring; Ball Bearing; 31MM



BEARING PRECISION AXLE CORP.

	Length Thru Bore; 15MM Outer Race Width; 52MM Outside Diameter; Relubricatable; Single Lip Contour Riding Seal; Eccentric Collar Mounting Method; No Sn
Inch - Metric	Metric
Other Features	Single Row Light Duty Steel Cage With Set Screw Has Trash Guard Metric
Category	Insert Bearings
UNSPSC	31171536
Harmonized Tariff Code	8482.10.50.00
Noun	Bearing
Keyword String	Insert
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	AEL205D1
Weight / LBS	0.485
Outside Diameter	2.047 Inch 52 Millimeter
Length Thru Bore	1.22 Inch 31 Millimeter
Outer Race Width	0.591 Inch 15 Millimeter
Bore	0.984 Inch 25 Millimeter
bore diameter:	25 mm
fillet radius:	1 mm
outside diameter:	52 mm
radial dynamic load capacity:	14000 N
outer ring width:	15 mm
radial static load capacity:	7850 N
inner ring width:	21.5 mm
bearing material:	Through Hardened Steel
bore type:	Round
finish/coating:	Uncoated



BEARING PRECISION AXLE CORP.

locking device:	Eccentric Collar
maximum rpm:	5900 RPM
duty type:	Standard Duty
seal type:	Contact
overall width:	31 mm
series:	AEL2
operating temperature range:	-40 to 120 ° C
manufacturer product page:	Click here