





# BEARING PRECISION AXLE CORP.

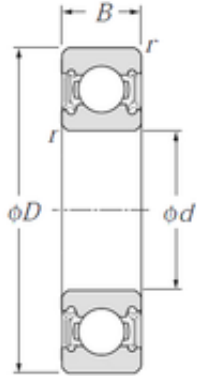

100 mm x 180 mm x 34 mm F-553585 / F553585  
 Beverage Manufacture Line Bearing  
 15\*40\*15.9mm

Bearing No. 6220LLU

6220LLU Bearing 2D drawings and 3D CAD models

Size	100x180x34 mm
Bore Diameter	100 mm
Outer Diameter	180 mm
Width	34 mm
d	100 mm
D	180 mm
B	34 mm
C	34 mm
r min.	2,1 mm
da min.	111 mm
da max	122 mm
Da max.	169 mm
ra max.	2 mm
Weight	3,14 Kg
Basic dynamic load rating (C)	122 kN
Basic static load rating (C0)	93 kN
Reference speed	2 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359005196
Product Group	B00308



## BEARING PRECISION AXLE CORP.

Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	100MM Bore; 180MM Outside Diameter; 34MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	6.92
Outer Race Width	1.339 Inch   34 Millimeter
Bore	3.937 Inch   100 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	7.087 Inch   180 Millimeter



## BEARING PRECISION AXLE CORP.

bore diameter:	100 mm
static load capacity:	93000 N
outside diameter:	180 mm
precision rating:	ISO Class 0
overall width:	34 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	34 mm
snap ring included:	Without Snap Ring
outer ring width:	34 mm
internal clearance:	CN
maximum rpm (grease):	2300 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	122000 N
manufacturer product page:	<a href="#">Click here</a>