




BEARING PRECISION AXLE CORP.

30 mm x 62 mm x 20 mm UCAK210-31 Low Center Base Pillow Block Bearing

Bearing No. 2206

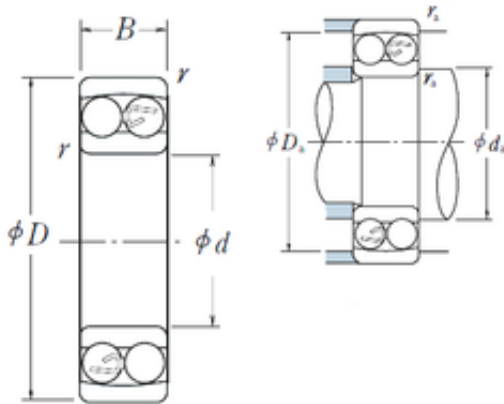

2206 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 30x62x20 mm |
| Bore Diameter | 30 mm |
| Outer Diameter | 62 mm |
| Width | 20 mm |
| d | 30 mm |
| D | 62 mm |
| B | 20 mm |
| C | 20 mm |
| r min. | 1 mm |
| da min. | 35 mm |
| Da max. | 57 mm |
| ra max. | 1 mm |
| Weight | 0,249 Kg |
| Basic dynamic load rating (C) | 15,3 kN |
| Basic static load rating (C0) | 4,55 kN |
| (Grease) Lubrication Speed | 10 000 r/min |
| (Oil) Lubrication Speed | 12 000 r/min |
| Calculation factor (e) | 0,38 |
| Calculation factor (Y0) | 1,7 |
| Calculation factor (Y2) | 2,5 |
| SRI | 4.17 |
| Y3 | 1.6 |
| hidYobi | 2206 |
| LangID | 1 |
| PCD | 46 |



BEARING PRECISION AXLE CORP.

| | |
|--------------|------------|
| D_ | 62 |
| Y2 | 2.5 |
| SREX | 0 |
| cyl count | 14 |
| B_ | 20 |
| hidTable | ecat_NSSAB |
| Oil rpm | 12000 |
| SRE | 0 |
| Y0 | 1.7 |
| mass | 0.249 |
| ra | 1 |
| GRS rpm | 10000 |
| SRIX | 0.04 |
| groove inner | 38.048 |
| D_a | 57 |
| SRIN | 0 |
| C0 | 4.55 |
| groove outer | 55.427 |
| SREN | 0 |
| X0 | 1 |
| Prod_Type3 | SABB_SA_CB |
| X1 | 1 |
| da | 35 |
| X2 | 0.65 |
| e | 0.38 |
| yobi | 2206 |
| r | 1 |
| KBRG | 1354 |
| CAng | 14.387 |
| cyl dia | 7.938 |